


Flexible Coupling XGQT2

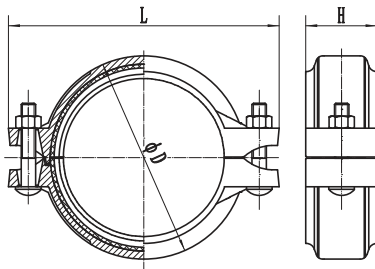

Nominal Size mm/in	Pipe O.D mm/in	Dimensions			Bolt inch/mm	Working pressure Psi	
		ΦD mm	L mm	H mm			
25	33.7	55	97	45	3/8×1-1/2 (M10×40)	300	
1	1.327						
32	42.4	63.5	107.5	45	3/8×1-3/4 (M10×45)		
11/4	1.669						
40	48.3	69	114	45			
11/2	1.9						
50	57	83.6	124	46	3/8×2-1/8 (M10×55)		
2	2.244						
50	60.3	83.6	124	46			
2	2.375						
65	73	98	137	46			
21/2	2.875						
65	76.1	98	139	46			
21/2	3						
80	88.9	114	156	46			
3	3.5						
100	108	138	186	50	1/2×2-5/8 (M12×65)		
4	4.25						
100	114.3	142	189	50			
4	4.5						
125	133	164	213	50			
5	5.25						
125	139.7	170	222	50			
5	5.5						
125	141.3	170	218	50			
5	5.563						
150	159	192	244	50			
6	6.25						
150	165.1	196	244	50			
6	6.5						
150	168.3	198	251	50			
6	6.625						
200	216.3	254	340	62	3/4×3-1/2 (M20×90)		
8	8.515						
200	219.1	256	316	58	5/8×3-1/8 (M16×80)		
8	8.625						
250	267.4	313	400	64	3/4×3-1/2 (M20×90)		
10	10.527						
250	273.0	319	393	64	3/4×3-1/2 (M20×90)		
10	10.75						
300	318.5	368	464	64	7/8×4-1/3 (M22×110)		
12	12.539						
300	323.9	374	453	65	3/4×4-1/3 (M20×110)		
12	12.75						
350	355.6	410	510	75	7/8×4-1/3 (M22×110)		
14	14						
400	406.4	459	555	75	7/8×5-1/2 (M22×140)		
16	16						
450	457.2	516	606	78	7/8×5-1/2 (M22×140)		
18	18						
450	480.0	540	631	78	7/8×6-1/3 (M22×160)		
18	18.9						
500	508.0	567	674	78	7/8×5-1/2 (M22×140)		
20	20						
550	558.8	622	728	78	7/8×5-1/2 (M22×140)		
22	22						
600	609.6	674	778	78	1×5-9/10 (M24×150)		
24	24						