



Push-on Coupling XGQT4

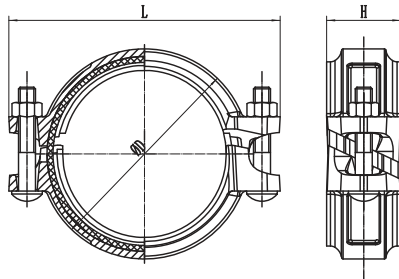

Nominal Size mm/in	Pipe O.D mm/in	Dimensions			Bolt/Nut inch/mm	Working pressure Psi
		ΦD mm	L mm	H mm		
32	42.4	71.5	112	47	2-3/8×60 (2-M10×60)	300
1 1/4	1.669					
40	48.3	78	117	47		
1 1/2	1.9					
50	60.3	90	132	48		
2	2.375					
65	76.1	106	150	48	2-3/8×70 (2-M10×70)	
2 1/2	3					
80	88.9	121	164	49	2-1/2×75 (2-M12×75)	
3	3.5					
100	114.3	147	190	52		
4	4.5					
125	139.7	174	222	52	2-1/2×80 (2-M12×80)	
5	5.5					
150	165.1	203	262	51	2-5/8×85 (2-M16×85)	
6	6.5					
150	168.3	203	263	51		
6	6.625					

Angle-pad Coupling GKS

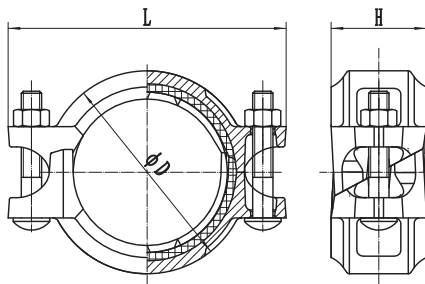

Nominal Size mm/in	Pipe O.D mm/in	Dimensions			Bolt	Working pressure Psi
		ΦD mm	L mm	H mm	inch/mm	
25	33.7	56	96	47	3/8×2-3/8 (M10×60)	300
1	1.327					
32	42.4	64	106	47		
1¼	1.669					
40	48.3	69	113	47		
1½	1.9					
50	60.3	88	122	47	3/8×2-3/4 (M10×70)	
2	2.375					
65	73	100	137	47		
2½	2.875					
65	76.1	100	137	47		
2½	3					
80	88.9	116	154	47		
3	3.5					
100	114.3	142	188	52	1/2×3 (M12×75)	
4	4.5					
125	139.7	170	219	52	1/2×3-1/8 (M12×80)	
5	5.5					
125	141.3	170	219	52		
5	5.563					
150	159	196	244	52		
6	6.25					
150	165.1	197	244	52		
6	6.5					
150	168.3	199	246	52		
6	6.625					
200	219.1	262	322	66	5/8×4-3/4 (M16×120)	
8	8.625					
250	273	325	400	66	3/4×6-7/10 (M20×170)	
10	10.75					
300	323.9	376	468	67	7/8×7-1/4 (M22×185)	
12	12.75					
350	355.6	410	500	75	7/8×7-1/2 (M22×190)	
14	14					
400	406.4	459	550	75	7/8×7-1/2 (M22×190)	
16	16					